

60 PELLET

PELLET STOVE



Measurements (W x D x H): 600 x 600 x 850-910 mm

Nominal heating power: 6,7 kW

Heating efficiency: 90%

Pellet tank: 20 kg



Optional



PANORAMA
Sand F7 / Stainless steel



PANORAMA
Stainless steel



PELLET TANK
Additional tank pellet
(can only be installed on the right)




60 PELLET

PELLET STOVE




Technical data (Data may vary depending on type of fuel used)

Fuel	Pellet
Energy efficiency class	A+
Nominal heating power	6,7 kW
Heating efficiency	90,0 %
η_s Seasonal space heating energy efficiency	88,0 %
Diameter smoke outlet	Ø 80 mm
Minimum draught	12 Pa / 0,12 mbar
Temperature smoke outlet	62° - 142° C
Smoke mass	5,4 g/s
CO at 13% O ₂	0,01 %
Weight	160 kg
Possible smoke outlets	4
Test report	C-1701401-1 rev.01
Pellet tank	20 kg
Pellet consumption	0,46 - 1,49 kg /h
Autonomy	43 - 13 h
Energy consumption Standby / Power 1 / Power 5	4 / 32-57 / 60-85 W/h
Hob (L x D)	500 x 500 mm
Diameter external air intake	Ø 50 mm
CO at 13% O ₂ (Carbon monoxide) / NOx (Nitrogen oxide)	17,0 mg/Nm ³ / 95,0 mg/Nm ³
Dust / OGC (Organic compounds)	14,0 mg/Nm ³ / 7,0 mg/Nm ³



To operate the oven light, install a Schuko socket either behind the baseboard at a maximum height of 50 mm from the floor, or at a maximum distance from the kitchen stove of 500 mm

* External air intake

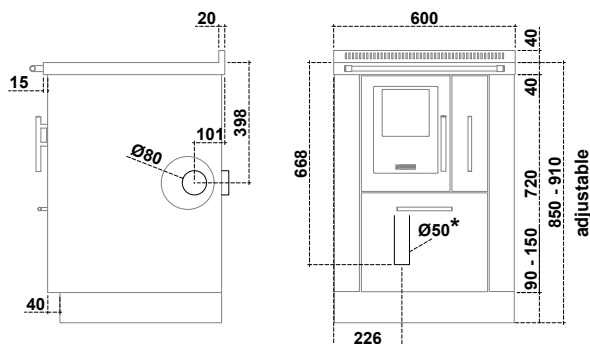

WARNING:

Minimum safety distance from flammable materials

From the rear and side connection to the chimney

* 40mm of insulation with heat conductivity equal to 0.07 W/mK at 200°C

P = 0 + 40* mm

Following agreement with chimney sweep

On the side above the plate

L = 400 mm

On the side below the plate

L = 3 mm

Above the plate

Min. 750 mm

In the front from the middle of the fire door

R = 250 mm

Plate for floor protection

Based on specific country directives

